



**EMERSON**  
Industrial Automation

 www.ruago.pt	Parque Industrial do Seixal Rua Rodrigo Sarmento de Beires Lote 12, Armazém 4 2840-069 Aldeia de Paio Pires   Seixal, Portugal
	Teif. (00351) 212 110 500 Fax. (00351) 212 110 509 geral@ruago.pt

## Commander SK

General purpose AC drive  
for machinery automation

0.25kW - 132kW (0.33hp - 200hp)  
100V / 200V / 400V / 575V / 690V

## Commander SK, the ultimate general purpose AC drive

Commander SK allows OEMs to add value to their machines whilst also minimising the installed cost. This is achieved through a simple to install, easy to use, yet high performance drive design with integrated features that allow advanced functions to be performed. Commander SK is robust and ideal for industrial automation systems.



## Meeting the drive needs of machinery manufacturers

Commander SK is easy and quick to procure, fit and commission, whether installing 1 or 1000 drives.

### Fast and easy **procurement**

- Control Techniques offer a single source for motors, soft starters, AC and DC drives and servos
- For high volume customers Control Techniques can integrate into your supply chain using lean distribution methods to minimise stock holding and maximise availability

### Fast and easy **installation**

- All drives can be mounted on a flat surface, plus
  - Low power Commander SK drives can click onto standard DIN Rail
  - Commander SK sizes 2 and above can be through panel mounted to allow heat to be dissipated externally. This mounting method allows smaller cabinet dimensions and reduces the need for ventilation
- Integrated features such as EMC filter, PID controller, kW hour meter, integrated brake chopper and onboard PLC option remove the need for many external components

### Fast and easy **connection**


- All connectors are generously sized and clearly labelled
- Control connections use screwless push connectors to reduce time required for wiring and increase reliability

### Fast and easy drive **set-up**

- Simple keypad and display included as standard
- Sufficient set-up information is detailed on the front fascia of the drive for the majority of applications
- For standardised/high volume manufacture, the SmartStick can be used to transfer drive settings to multiple drives
- For more complex applications, a CD containing detailed documentation and free software tools is included to assist with configuration and monitoring

### Fast and easy **support**


- Commander SK is supported through a global engineering network of 53 Control Techniques Drive Centres in 31 countries, plus authorised resellers located within 36 additional countries
- Commander SK is reliable and requires no scheduled servicing
- 2+ year warranty is honoured worldwide no matter where your drive is installed

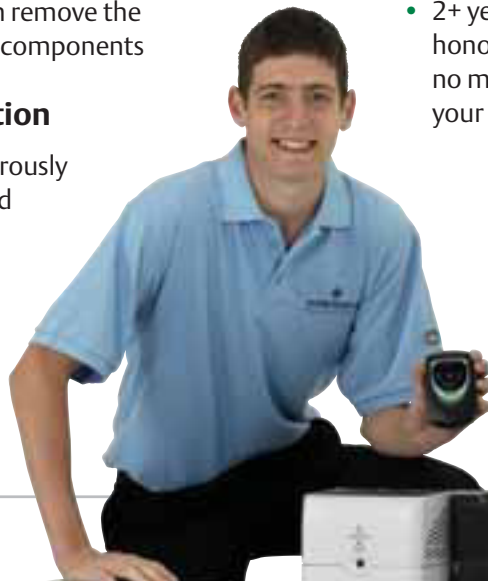

Commander SK range  
0.25kW to 132kW with SK-Keypad Remote

# Commander SK - Fast and easy integration flexibility

## Control mode

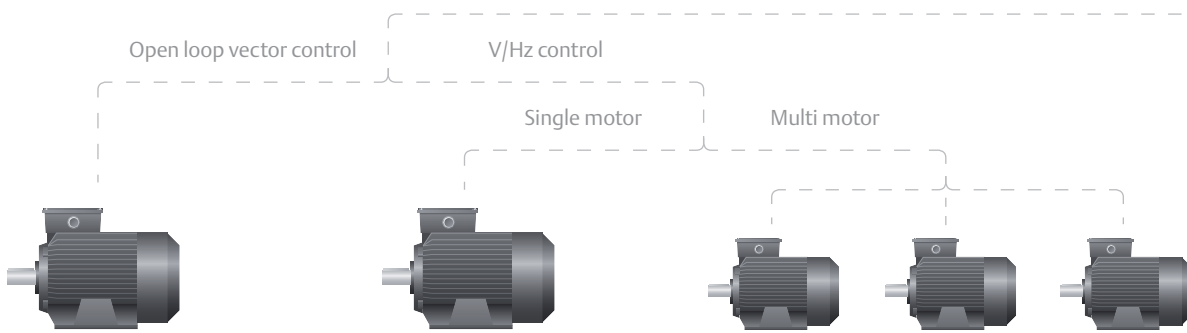

## Drive programming and operator interface options

Operator Interface	CT comms cable/ CT USB comms cable	SM-Keypad Plus	SK-Keypad Remote*	SmartStick	LogicStick
		Remote panel mounting LCD multilingual text keypad display to IP54 (NEMA 12)	Remote panel mounting LED display to IP65 (NEMA 12)	Upload drive parameters to the SmartStick for storage or for easy set-up of identical drives	The LogicStick enables the user to program PLC functions within the drive. It can also be used as a SmartStick


## Input/Output

Standard	Options					
	SM-I/O 32	SM-I/O 24V Protected	SM-I/O Lite	SM-I/O Timer	SM-I/O 120V	SM-PELV
4 Digital inputs 1 Digital input/output 1 Relay output 2 Analog inputs 1 Analog output						

## Typical applications




## Communications

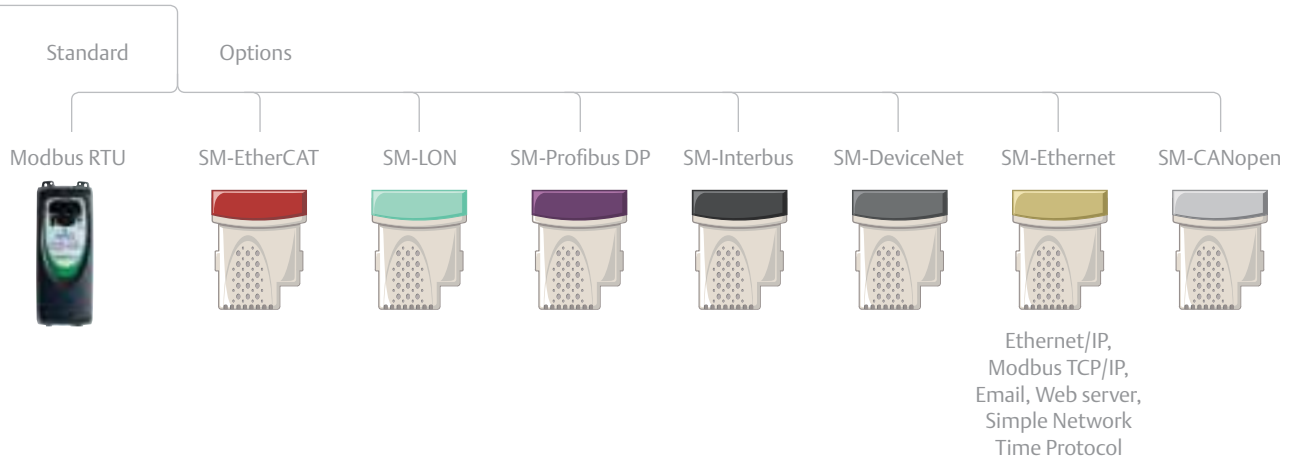

## Installation accessories



\* Applicable on sizes A to D only. \*\* Applicable on sizes A to C only. Sizes 2 to 6 have cable management accessories included as standard.

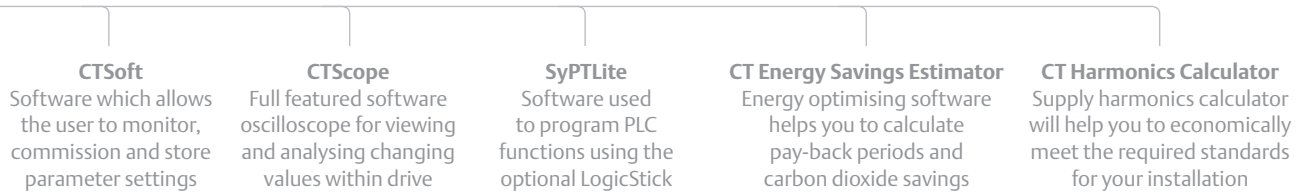

## Commander SK specifications and dimensions

### Specifications


- Automatic no-spin autotune for rapid performance optimisation
- 8 preset speeds available for greater application flexibility
- Keypad access to all parameters – basic and advanced menus
- Open loop vector control. Speed or Torque control
- Speed reference input: 0-10V, 0-20mA, 4-20mA (-10V to +10V SM-I/O Lite option)
- Switching frequency from 3kHz up to 18kHz - quiet motor operation
- Output frequency from 0 to 1500 Hz
- Linear and S type acceleration and deceleration ramps
- Modbus RTU RS485 via RJ45 connector as standard
- DC injection braking as standard
- Dynamic braking transistor as standard
- Energy savings with dynamic motor flux V/Hz
- Fan and pump energy optimisation with quadratic motor flux V/Hz
- Advanced standard software features, such as timers, thresholds, maths blocks, logic operators, PID controller and kW/h meter

### Environmental safety and electrical conformance

- IP20
- UL Type 1 kit and cover kit options up to size D
- Ambient temperature -10°C to 40°C
- Electromagnetic Immunity complies with EN61800-3, EN61000-6-1 and EN61000-6-2
- Humidity 95% maximum (non-condensing)
- Electromagnetic Emissions complies with EN61800-3 (second environment) as standard. Complies with EN61000-6-3 (residential) and EN61000-6-4 (industrial) generic standards with optional footprint EMC filter



### Dimensions

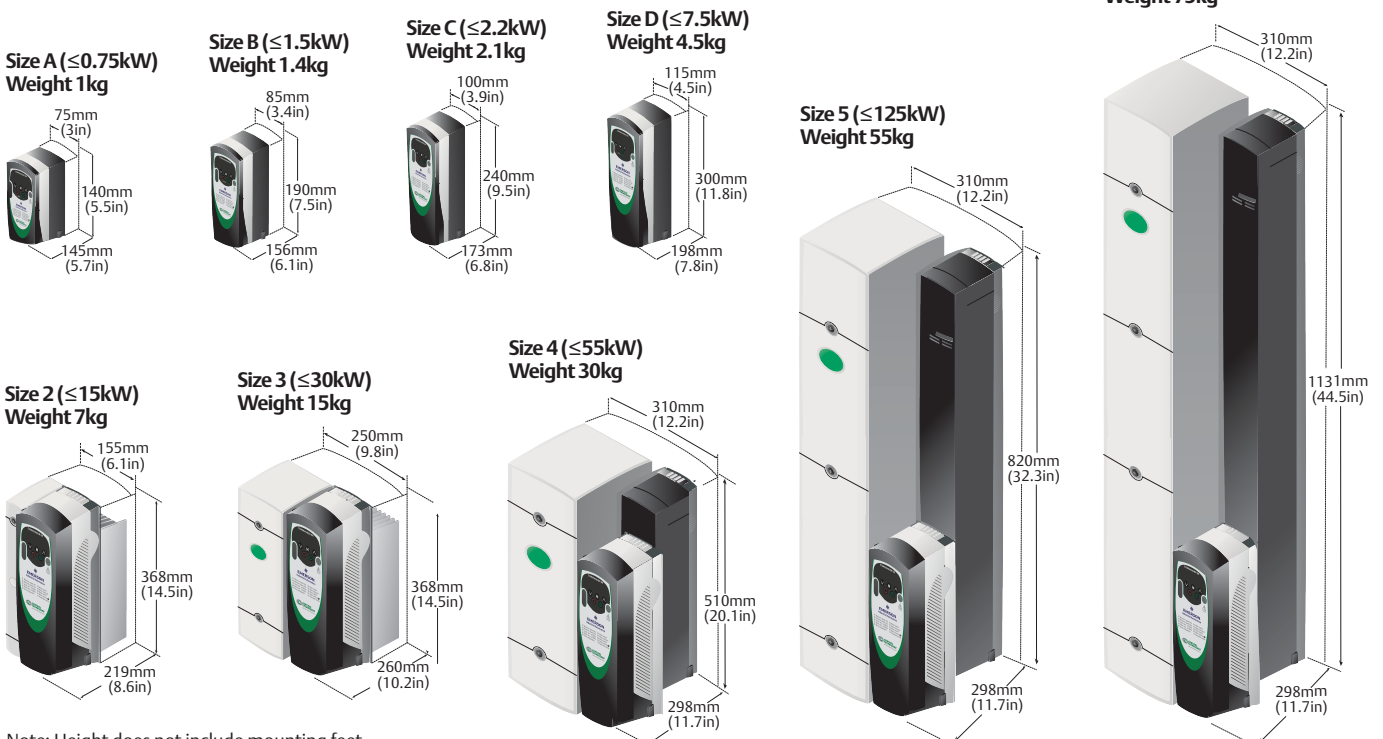

# Ratings

Frame Size	100/120 VAC +/- 10% 1 phase (200   240 VAC output)	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
A	SKA1100025				1.7	0.25	0.33
	SKA1100037				2.2	0.37	0.5
B	SKB1100075				4	0.75	1
	SKB1100110				5.2	1.1	1.5

Frame Size	200 / 240 VAC +/- 10% 1 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
A	SKA1200025				1.7	0.25	0.33
	SKA1200037				2.2	0.37	0.5
	SKA1200055				3	0.55	0.75
	SKA1200075				4	0.75	1
B	SKBD200110				5.2	1.1	1.5
	SKBD200150				7	1.5	2
C	SKCD200220				9.6	2.2	3
D	SKDD200300				12.6	3	3

Frame Size	200 / 240 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
B	SKBD200110				5.2	1.1	1.5
	SKBD200150				7	1.5	2
C	SKCD200220				9.6	2.2	3
D	SKDD200300				12.6	3	3
	SKD3200400				17	4	5
2	SK2201	15.5	4	5	12.6	3	3
	SK2202	22	5.5	7.5	17	4	5
	SK2203	28	7.5	10	25	5.5	7.5
3	SK3201	42	11	15	31	7.5	10
	SK3202	54	15	20	42	11	15
4	SK4201	68	18.5	25	56	15	20
	SK4202	80	22	30	68	18.5	25
	SK4203	104	30	40	80	22	30

Frame Size	380 / 480 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
B	SKB3400037				1.3	0.37	0.5
	SKB3400055				1.7	0.55	0.75
	SKB3400075				2.1	0.75	1
	SKB3400110				2.8	1.1	1.5
C	SKB3400150				3.8	1.5	2
	SKC3400220				5.1	2.2	3
D	SKC3400300				7.2	3	3
	SKC3400400				9	4	5
D	SKD3400550				13	5.5	7.5
	SKD3400750				16.5	7.5	10

Frame Size	380 / 480 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
2	SK2401	15.3	7.5	10	13	5.5	7.5
	SK2402	21	11	15	16.5	7.5	10
	SK2403	29	15	20	25	11	20
	SK2404				29	15	20
3	SK3401	35	18.5	25	32	15	25
	SK3402	43	22	30	40	18.5	30
	SK3403	56	30	40	46	22	30
4	SK4401	68	37	50	60	30	50
	SK4402	83	45	60	74	37	60
	SK4403	104	55	75	96	45	75
5	SK5401	138	75	100	124	55	100
	SK5402	168	90	125	156	75	125
6	SK6401	205	110	150	180	90	150
	SK6402	236	132	200	210	110	150

Frame Size	575 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
3	SK3501	5.4	3	3	4.1	2.2	2
	SK3502	6.1	4	5	5.4	3	3
	SK3503	8.4	5.5	7.5	6.1	4	5
	SK3504	11	7.5	10	9.5	5.5	7.5
	SK3505	16	11	15	12	7.5	10
	SK3506	22	15	20	18	11	15
	SK3507	27	18.5	25	22	15	20
4	SK4603	36	22	30	27	18.5	25
	SK4604	43	30	40	36	22	30
	SK4605	52	37	50	43	30	40
5	SK5601	84	55	75	63	45	60
	SK5602	99	75	100	85	55	75
6	SK6601	125	90	125	100	75	100
	SK6602	144	110	150	125	90	125

Frame Size	690 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
4	SK4601	22	18.5	25	19	15	20
	SK4602	27	22	30	22	18.5	25
	SK4603	36	30	40	27	22	30
	SK4604	43	37	50	36	30	40
	SK4605	52	45	60	43	37	50
5	SK4606	62	55	75	52	45	60
	SK5601	84	75	100	63	55	75
6	SK5602	99	90	125	85	75	100
	SK6601	125	110	150	100	90	125
	SK6602	144	132	175	125	110	150

Normal Duty	Heavy Duty
110% overload current for 215 s. For applications which use self-ventilated induction motors and require a low overload capability (e.g. fans, pumps)	150% overload current for 60 s. For constant torque applications which require a high overload capability (e.g. cranes, hoists)

## Control Techniques Drive & Application Centres

<p><b>AUSTRALIA</b> Melbourne Application Centre T: +613 973 81777 controltechniques.au@emerson.com</p> <p>Sydney Drive Centre T: +61 2 9838 7222 controltechniques.au@emerson.com</p>	<p><b>DENMARK</b> Copenhagen Drive Centre T: +45 4369 6100 controltechniques.dk@emerson.com</p> <p><b>FRANCE*</b> Angoulême Drive Centre T: +33 5 4564 5454 controltechniques.fr@emerson.com</p> <p><b>GERMANY</b> Bonn Drive Centre T: +49 2242 8770 controltechniques.de@emerson.com</p> <p>Chemnitz Drive Centre T: +49 3722 52030 controltechniques.de@emerson.com</p> <p>Darmstadt Drive Centre T: +49 6251 17700 controltechniques.de@emerson.com</p> <p><b>GREECE*</b> Athens Application Centre T: +0030 210 57 86086/088 controltechniques.gr@emerson.com</p> <p><b>HOLLAND</b> Rotterdam Drive Centre T: +31 184 420555 controltechniques.nl@emerson.com</p> <p><b>HONG KONG</b> Hong Kong Application Centre T: +852 2979 5271 controltechniques.hk@emerson.com</p> <p><b>INDIA</b> Chennai Drive Centre T: +91 44 2496 1123/ 2496 1130/2496 1083 controltechniques.in@emerson.com</p> <p>Pune Application Centre T: +91 20 2612 7956/2612 8415 controltechniques.in@emerson.com</p>	<p>New Delhi Application Centre T: +91 112 2581 3166 controltechniques.in@emerson.com</p> <p><b>IRELAND</b> Newbridge Drive Centre T: +353 45 448200 controltechniques.ie@emerson.com</p> <p><b>ITALY</b> Milan Drive Centre T: +39 02575 751 controltechniques.it@emerson.com</p> <p>Reggio Emilia Application Centre T: +39 02575 751 controltechniques.it@emerson.com</p> <p>Vicenza Drive Centre T: +39 0444 933400 controltechniques.it@emerson.com</p> <p><b>KOREA</b> Seoul Application Centre T: +82 2 3483 1605 controltechniques.kr@emerson.com</p> <p><b>MALAYSIA</b> Kuala Lumpur Drive Centre T: +603 5634 9776 controltechniques.my@emerson.com</p> <p><b>REPUBLIC OF SOUTH AFRICA</b> Johannesburg Drive Centre T: +27 11 462 1740 controltechniques.za@emerson.com</p> <p>Cape Town Application Centre T: +27 21 556 0245 controltechniques.za@emerson.com</p> <p><b>RUSSIA</b> Moscow Application Centre T: +7 495 981 9811 controltechniques.ru@emerson.com</p>	<p><b>SINGAPORE</b> Singapore Drive Centre T: +65 6891 7600 controltechniques.sg@emerson.com</p> <p><b>SLOVAKIA</b> EMERSON A.S T: +421 32 7700 369 controltechniques.sk@emerson.com</p> <p><b>SPAIN</b> Barcelona Drive Centre T: +34 93 680 1661 controltechniques.es@emerson.com</p> <p>Bilbao Application Centre T: +34 94 620 3646 controltechniques.es@emerson.com</p> <p>Valencia Drive Centre T: +34 96 154 2900 controltechniques.es@emerson.com</p> <p><b>SWEDEN*</b> Stockholm Application Centre T: +468 554 241 00 controltechniques.se@emerson.com</p> <p><b>SWITZERLAND</b> Lausanne Application Centre T: +41 21 637 7070 controltechniques.ch@emerson.com</p> <p>Zurich Drive Centre T: +41 56 201 4242 controltechniques.ch@emerson.com</p> <p><b>TAIWAN</b> Taipei Application Centre T: +886 22325 9555 controltechniques.tw@emerson.com</p> <p><b>THAILAND</b> Bangkok Drive Centre T: +66 2962 2092 99 controltechniques.th@emerson.com</p> <p><b>TURKEY</b> Istanbul Drive Centre T: +90 216 4182420 controltechniques.tr@emerson.com</p>	<p><b>UAE*</b> Emerson FZE T: +971 4 8118100 ct.dubai@emerson.com</p> <p><b>UNITED KINGDOM</b> Telford Drive Centre T: +44 1952 213700 controltechniques.uk@emerson.com</p> <p><b>USA</b> California Drive Centre T: +1 562 943 0300 controltechniques.us@emerson.com</p> <p>Charlotte Application Centre T: +1 704 393 3366 controltechniques.us@emerson.com</p> <p>Chicago Application Centre T: +1 630 752 9090 controltechniques.us@emerson.com</p> <p>Cleveland Drive Centre T: +1 440 717 0123 controltechniques.us@emerson.com</p> <p>Florida Drive Centre T: +1 239 693 7200 controltechniques.us@emerson.com</p> <p>Latin America Sales Office T: +1 305 818 8897 controltechniques.us@emerson.com</p> <p>Minneapolis US Headquarters T: +1 952 995 8000 controltechniques.us@emerson.com</p> <p>Oregon Drive Centre T: +1 503 266 2094 controltechniques.us@emerson.com</p> <p>Providence Drive Centre T: +1 401 541 7277 controltechniques.us@emerson.com</p> <p>Utah Drive Centre T: +1 801 566 5521 controltechniques.us@emerson.com</p>
--	---	---	--	---

## Control Techniques Distributors

<p><b>ARGENTINA</b> Euro Techniques SA T: +54 11 4331 7820 eurotech@eurotechsa.com.ar</p> <p><b>BAHRAIN</b> Emerson FZE T: +971 4 8118100 ct.bahrain@emerson.com</p> <p><b>BULGARIA</b> BLS - Automation Ltd T: +359 32 968 007 info@blsaautomation.com</p> <p><b>CHILE</b> Ingeniería Y Desarrollo Tecnológico S.A T: +56 2 719 2200 rdunner@idt.cl</p> <p><b>COLOMBIA</b> Sistronic LTDA T: +57 2 555 60 00 luis.alvarez@sistronic.com.co</p> <p>Redes Electricas S.A. T: +57 1 364 7000 alvaro.rodriquez@redeselectricas.com</p> <p><b>CROATIA</b> Zigg-Pro d.o.o T: +385 1 3463 000 zigg-pro@zg.tnnet.hr</p>	<p><b>CYPRUS</b> Acme Industrial Electronic Services Ltd T: +3572 5 332181 acme@cytanet.com.cy</p> <p><b>EGYPT</b> Samiram T: +202 29703868/ +202 29703869 samiramz@samiram.com</p> <p><b>EL SALVADOR</b> Servielectric Industrial S.A. de C.V. T: +503 2278 1280 aeorellana@gruposervielectric.com</p> <p><b>FINLAND</b> SKS Control T: +358 207 6461 control@sksf.fi</p> <p><b>GUATEMALA</b> MICE, S.A. T: +502 5510 2093 mice@itelgua.com</p> <p><b>HONDURAS</b> Temtronics Honduras T: +504 550 1801 temtronics@amnetn.com</p>	<p><b>HUNGARY</b> Control-VH Kft T: +361 431 1160 info@controlvh.hu</p> <p><b>ICELAND</b> Samey ehf T: +354 510 5200 samey@samey.is</p> <p><b>INDONESIA</b> Pt. Apikon Indonesia T: +65 6468 8979 info.my@controltechniques.com</p> <p>Pt Yua Esa Sempurna Sejahtera T: +65 6468 8979 info.my@controltechniques.com</p> <p><b>ISRAEL</b> Dor Drives Systems Ltd T: +972 3900 7595 info@dor1.co.il</p> <p><b>KENYA</b> Kassam &amp; Bros Co. Ltd T: +254 2 556 418 kassambros@africaonline.co.ke</p> <p><b>KUWAIT</b> Emerson FZE T: +971 4 8118100 ct.kuwait@emerson.com</p>	<p><b>LATVIA</b> EMT T: +371 760 2026 janis@emt.lv</p> <p><b>LEBANON</b> Black Box Automation &amp; Control T: +961 1 443773 info@blackboxcontrol.com</p> <p><b>LITHUANIA</b> Elinta UAB T: +370 37 351 987 sigitas@elinta.lt</p> <p><b>MALTA</b> Mekanika Limited T: +35621 442 039 mfrancia@gasan.com</p> <p><b>MEXICO</b> MELCSA S.A. de C.V. T: +52 55 5561 1312 jcervera@melcsa.com</p> <p><b>MOROCCO</b> Cietec T: +212 22 354948 cietec@cietec.ma</p> <p><b>NEW ZEALAND</b> Advanced Motor Control. Ph. T: +64 (0) 274 363 067 info.au@controltechniques.com</p>	<p><b>PERU</b> Intech S.A. T: +51 1 224 9493 artur.mujamed@intech-sa.com</p> <p><b>PHILIPPINES</b> Control Techniques Singapore Ltd T: +65 6468 8979 info.my@controltechniques.com</p> <p><b>POLAND</b> APATOR CONTROL Sp. z o.o T: +48 56 6191 207 info@acontrol.com.pl</p> <p><b>PORTUGAL</b> Harker Sumner S.A T: +351 22 947 8090 drives.automation@harker.pt</p> <p><b>PUERTO RICO</b> Motion Industries Inc. T: +1 787 251 1550 roberto.diaz@motion-ind.com</p> <p><b>QATAR</b> Emerson FZE T: +971 4 8118100 ct.qatar@emerson.com</p> <p><b>ROMANIA</b> C.I.T. Automatizari T: +40212550543 office@citautomatizari.ro</p>	<p><b>SAUDI ARABIA</b> A. Abunayyan Electric Corp. T: +9661 477 9111 aec-salesmarketing@abunayyanguroup.com</p> <p><b>SERBIA &amp; MONTENEGRO</b> Master Inzenjering d.o.o T: +381 24 551 605 office@masterinzenjering.rs</p> <p><b>SLOVENIA</b> PS Logatec T: +386 1 750 8510 ps-log@ps-log.si</p> <p><b>TUNISIA</b> SIA Ben Djemaa &amp; CIE T: +216 1 332 923 bendjemaa@planet.tn</p> <p><b>URUGUAY</b> SECOIN S.A. T: +5982 2093815 jose.barron@secoin.com.uy</p> <p><b>VENEZUELA</b> Digimex Sistemas C.A. T: +58 243 551 1634 digimex@digimex.com.ve</p> <p><b>VIETNAM</b> N.Duc Thinh T: +84 8 9490633 infotech@nducthinh.com.vn</p>
--	--	--	---	--	---